





HB 50 E1

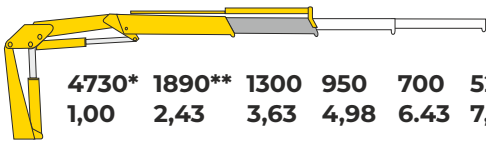

Kg	4730*	1890**	1300	950	700	520
m	1,00	2,43	3,63	4,98	6.43	7,88

HB 50 E2

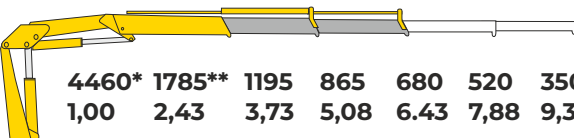

Kg	4460*	1785**	1195	865	680	520	350
m	1,00	2,43	3,73	5,08	6.43	7,88	9,39

*) Theoretical lifting capacity, **) Fixed hook Capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	Kg	l	l/min	mm B x H x S
HB50 E1	4,73	7,75	370	15	3	250	515	30	16	1966X1780X500
HB50 E2	-	9,14	370	15	3	250	560	30	16	1966X1780X500



Building



Construction



Oil&Gas



Mining



Rental



Logistic



Gardening



Power station



Maintenance



Waste handling